




Specifications

Shell & Locknut	Nickel-plated brass
Connector Insert	PVC
Gasket	Neoprene
Thrust washer	Nylon
Contacts	Gold-plated palladium/nickel
Enclosure Rating	IP67
Temperature	-20°C to 105°C (-4°F to 221°F)

Dimensions

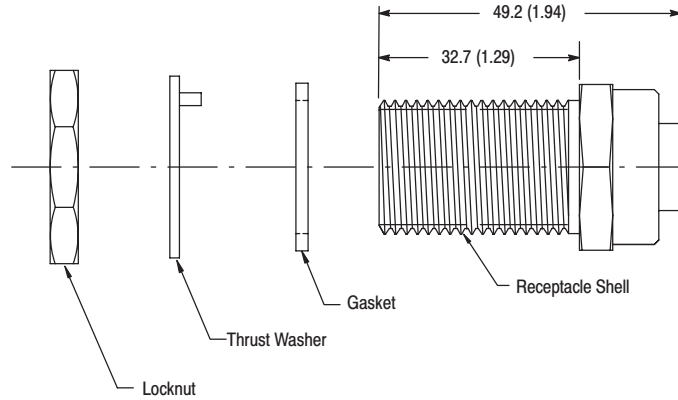

Features

- Male to female bulkhead passthru provides flexibility in thru-panel installations
- 4-pin and 5-pin mini versions for use with standard wiring or DeviceNet implementations

Product Selection

Face View of Female	Rating	Face View of Male	Catalog Number
	600V 10A		889A-CXN4-M4
	600V 8A		1485A-CXN5-M5

Bulkhead Pass-thru, DC Micro




Specifications

Shell & Locknut	Nickel-plated brass
Connector Insert	Nylon
Gasket	Neoprene
Thrust washer	Steel Alloy
Contacts	Gold-plated palladium/nickel
Enclosure Rating	IP67
Temperature	-20°C to +80°C (-4°F to +176°F)



Features

- Male to female bulkhead pass-thru provides flexibility in thru-panel installations
- Standard 5-pin DC micro version allows use for a variety of pin-count configurations

Dimensions—mm (inches)

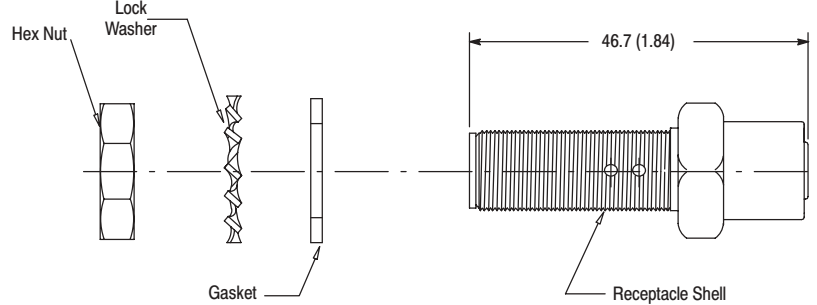

Product Selection

Face View of Female	Rating	Face View of Male	Catalog Number
	250V 4A		1485A-CXR5-D5