


1305 Dimensions and Mounting Requirements

Bulletin 1305 Approximate Dimensions


Dimensions shown in millimeters (inches). Shipping weights shown in kilograms (pounds).

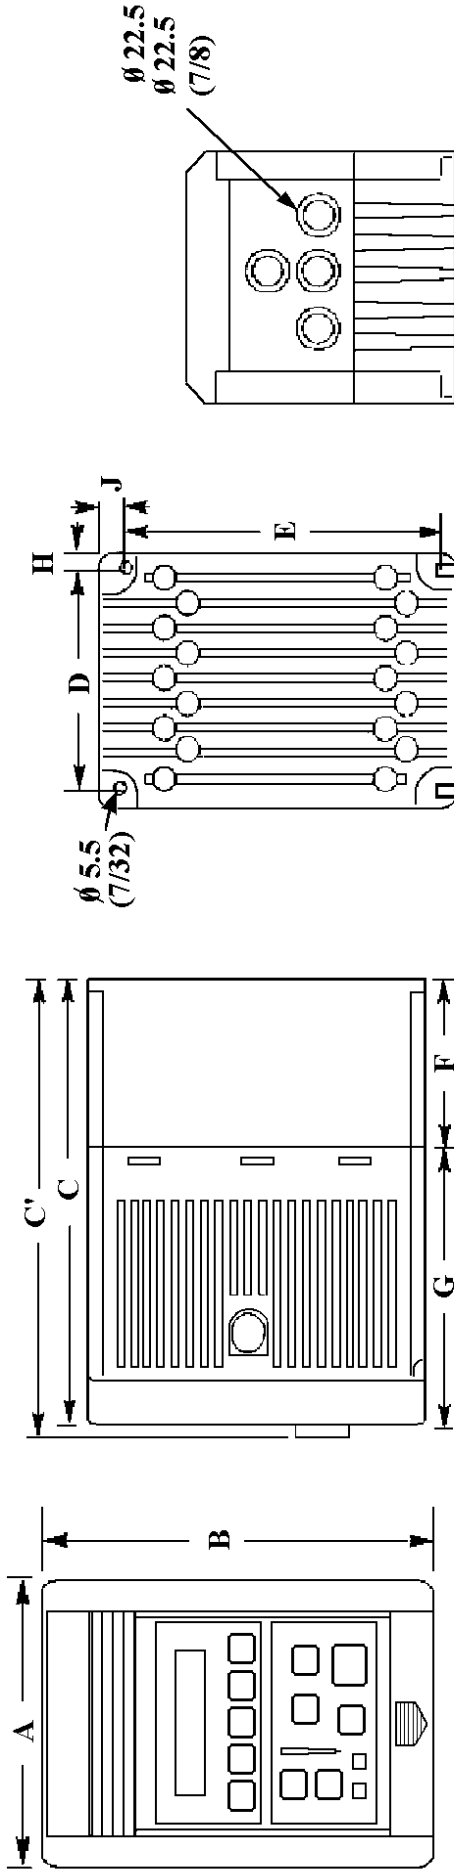

200/230 V Cat. No. 1305	380/460 V Cat. No. 1305-	A Width	B Height	C Depth w/o Pot	C' Depth w/ Pot	D	E	F	G	H	J	Approx. Ship Wt.
AA02A		120	195	122	127.1	110	180	9	113	5	7.5	1.6
AA03A		(4-23/32)	(7-11/16)	(4-13/16)	(5)	(4-11/32)	(7-1/16)	(11/32)	(4-7/16)	(7/32)	(5/16)	(3.5)
AA040		120	195	140	145.1	110	180	27	113	5	7.5	1.9
		(4-23/32)	(7-11/16)	(5-1/2)	(5-23/32)	(4-11/32)	(7-1/16)	(1-1/16)	(4-7/16)	(7/32)	(5/16)	(4.2)
AA08A	BA01A	170	195	179	184.1	160	180	66	113	5	7.5	3.6
	BA02A	(6-11/16)	(7-11/16)	(7-1/16)	(7-1/4)	(6-5/16)	(7-1/16)	(2-19/32)	(4-7/16)	(7/32)	(5/16)	(8.0)
	BA03A											
	BA04A											
	BA06A											
AA12A	BA09A	210	195	179	184.1	200	180	66	113	5	7.5	4.2
AA18A		(8-1/4)	(7-11/16)	(7-1/16)	(7-1/4)	(7-7/8)	(7-1/16)	(92-19/32)	(4-7/16)	(7/32)	(5/16)	(9.2)

Mounting Requirements

ATTENTION: The following information is merely a guide for proper installation. The National Electrical Code and any other governing regional or local code will overrule this information. The Allen-Bradley Company cannot assume the responsibility for the compliance or the noncompliance to any code, national, local or otherwise for the proper installation of this drive or associated equipment. A hazard of personal injury and/or equipment damage if codes are ignored during installation.

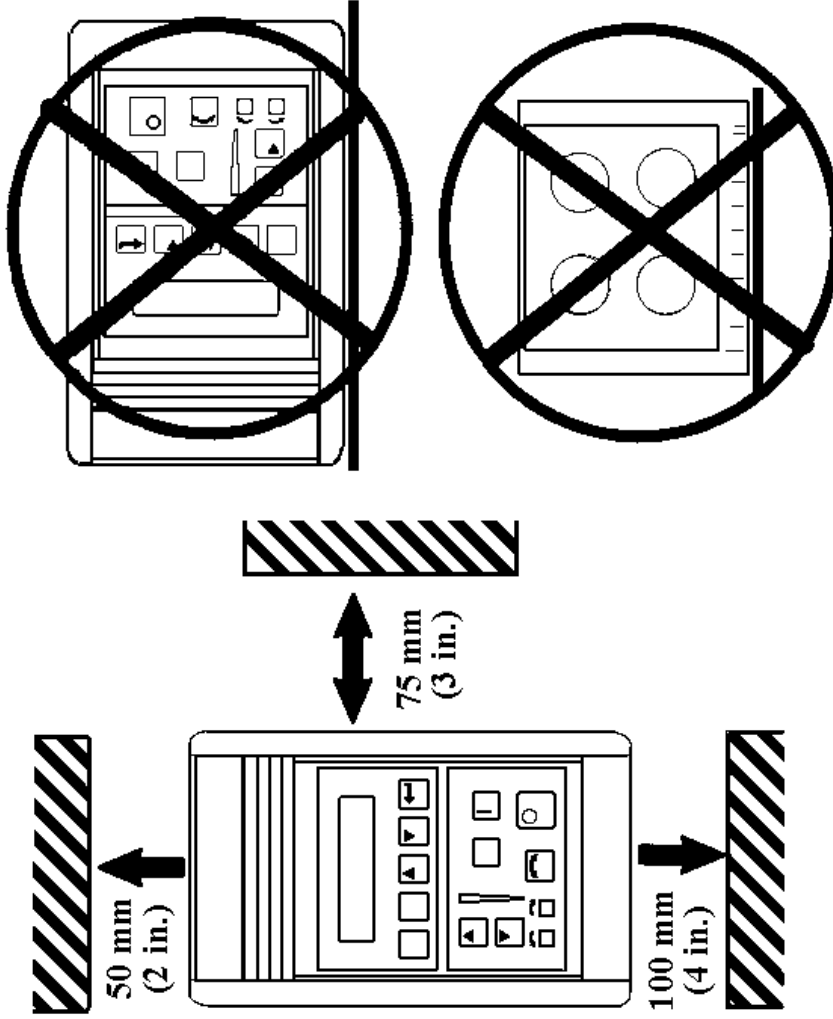

IMPORTANT: The drive must be mounted to a metallic surface.